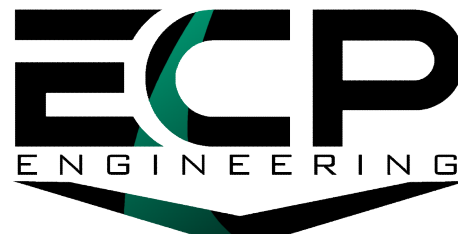


**NOTES:**

1. HOT DIP GALVANIZED PER ASTM A123 GRADE 100 (LATEST REV)
2. PIPE SHAFT MATERIAL PER A500 GRADE B MIN YIELD 50 KSI
3. COUPLING BOLT: 3/4"Ø x 4-1/4" LONG HEX HEAD PER SAE J429 GRADE 8.
4. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES
5. ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1
6. CAP TO FIT OVER 2-7/8"Ø THICK PILE SHAFT.
7. ICC-ESR-3559

DRAWN GDR	DATE 3/22/2024		CONFIDENTIAL. THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF EARTH CONTACT PRODUCTS, LLC. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF ECP. ALL RIGHTS RESERVED UNDER COPYRIGHT LAW.
DWG NO. SD-TAB-288-T			
DESCRIPTION TENSION CAP FOR 2-7/8"OD x 0.203" THICK SHAFT			
NOT TO SCALE ALL UNITS IN INCHES U.N.O.	SIZE B	15612 S KEELER TERRACE OLATHE, KS 66062 (913) 393-0007   www.GETECP.com	REV 1
			SHEET 1 OF 1