



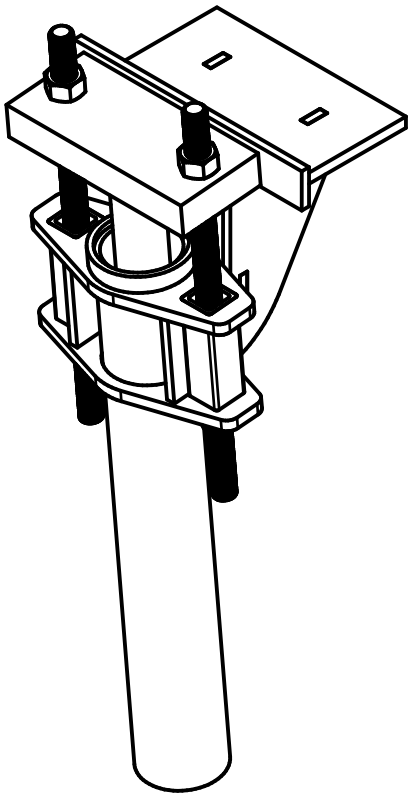

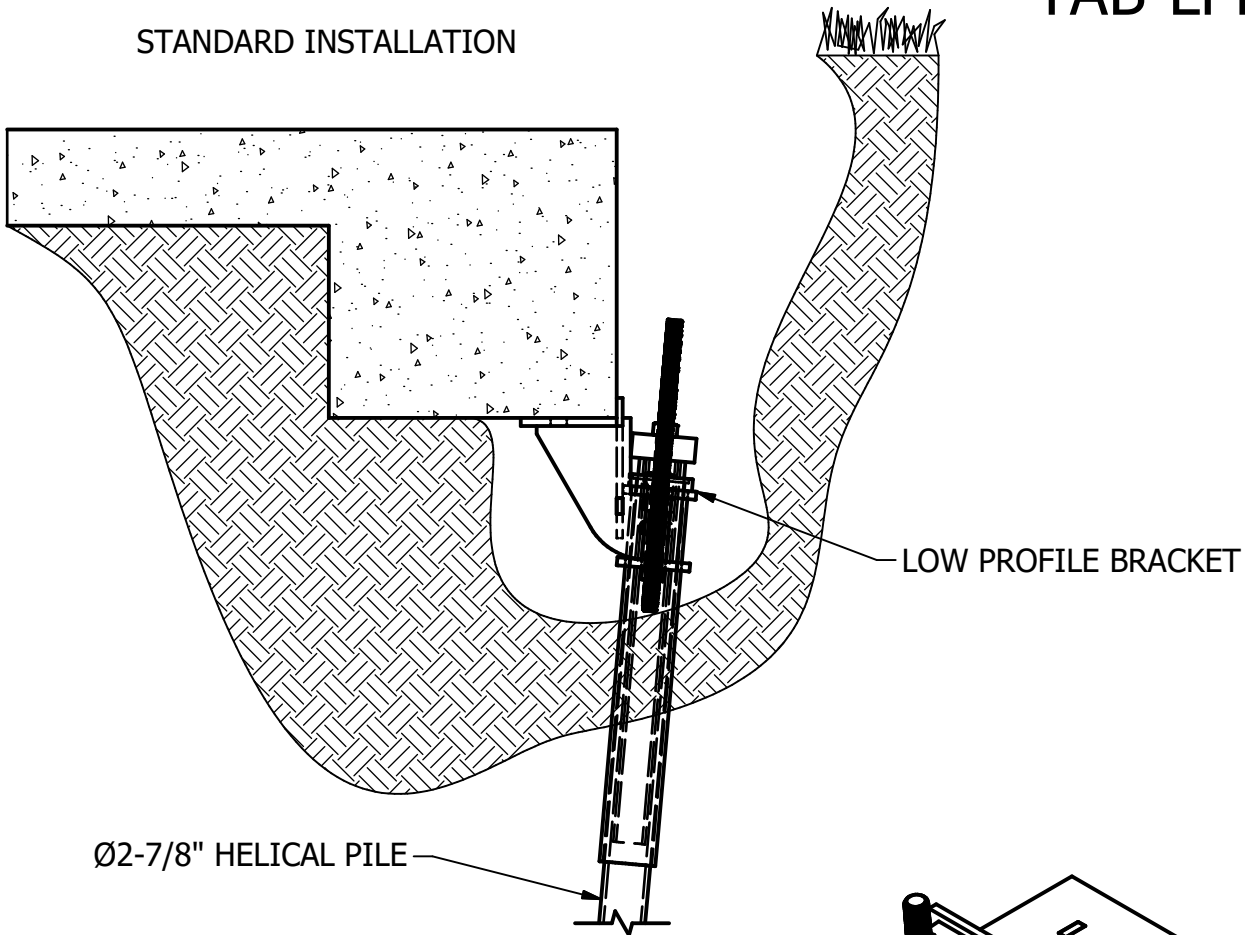


TAB-LPB - LOW PROFILE BRACKET

STANDARD INSTALLATION

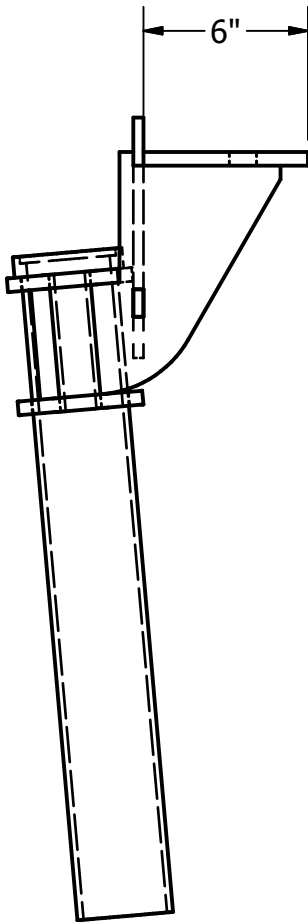

TAB-288-TT

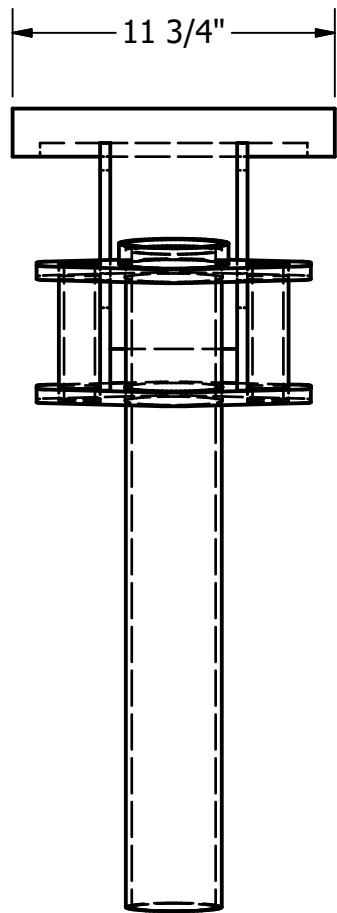


- NOTES:
1. HOT DIP GALVANIZE PER ASTM A123 GRADE 100 (LATEST REV.)
 2. BRACKET MATERIAL 3/8" THICK HOT ROLLED STEEL PER ASTM A572 MIN. YIELD STRENGTH 50 KSI.
 3. ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1
 4. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES
 5. COMPATIBLE WITH TA-288 PRODUCT LINES

ITEM	PART NO.	DESCRIPTION	QTY.
1	TAB-28-LPB-1	BACK PLATE	1
2	TAB-28-LPB-2	SIDE PLATE	2
3	TAB-28-LPB-3	SEATING PLATE	1
4	TAB-28-LPB-4	SIDE TUBE	2
5	TAB-28-LPB-5	CONTROL PLATE	2
6	TAB-28-LPB-6	ALIGNMENT SLEEVE	1
7	TAB-288-TT	2-7/8" T-TUBE CAP	1
8	HAT7-088-18-CNZ	THREADED ROD & NUTS	2

WORKING LOAD	20,000 LBS.
ULTIMATE LOAD	40,000 LBS.
BEARING AREA	58.5 SQ. IN
LIFT CAPACITY	4 IN

DRAWN GDR	DATE 4/28/2025
DWG NO. SD-TAB-LPB	
DESCRIPTION LOW PROFILE BRACKET	
NOT TO SCALE ALL UNITS IN INCHES U.N.O.	

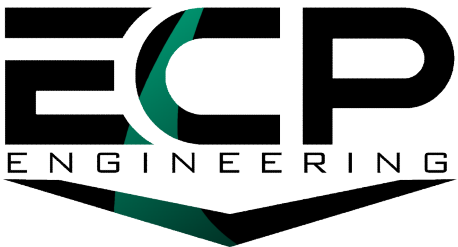

SIZE
B
15612 S KEELER TERRACE
OLATHE, KS 66062
(913) 393-0007 | www.GETECP.com

REV
0

CONFIDENTIAL. THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF EARTH CONTACT PRODUCTS, LLC. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF ECP. ALL RIGHTS RESERVED UNDER COPYRIGHT LAW.