


DETAIL A  
SCALE 1 / 2

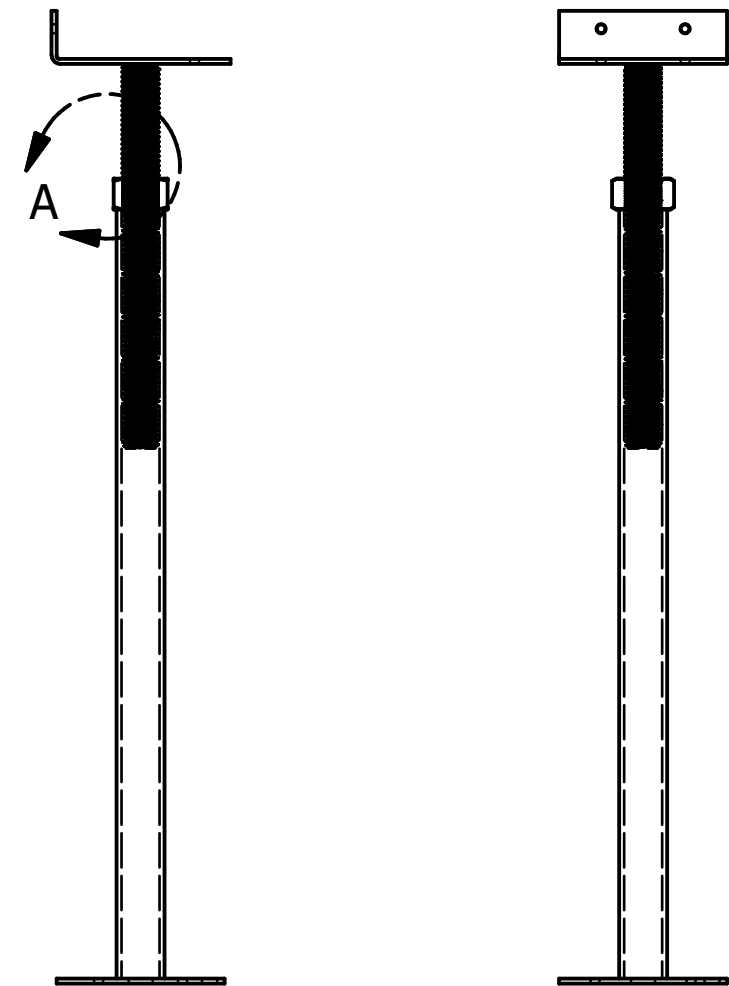

**NOTES:**

1. ALL THREAD ROD, NUT, AND TOP CAP BLACK (BARE) STEEL
2. SUPPORT TUBE AND BASE PLATE ARE HOT DIP GALVANIZED PER ASTM A123 (LATEST REV)
3. BRACKET MATERIAL 12 GA. THICK HOT ROLLED STEEL
4. ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1
5. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES

ITEM	PART NUMBER	DESCRIPTION	QTY
1	CSJ-001-CP1	TOP CAP	1
2	CSJ-002-BP1	BASE PLATE	1
3	CSJ-003-STY	SUPPORT TUBE	1
4	HAT-075-LL-B	3/4"Ø ALL THREAD ROD	1
5	HN2-075-HB	3/4"Ø HEX NUT	1


WORKING LOAD	2,200 LBS.
ULTIMATE LOAD	4,400 LBS.
BEARING AREA	12-11/16 SQ. IN

DRAWN GDR DATE 2/14/2025

DWG NO. SD-CSJ-075-016

DESCRIPTION CRAWL SPACE JACK

NOT TO SCALE ALL UNITS IN INCHES U.N.O.

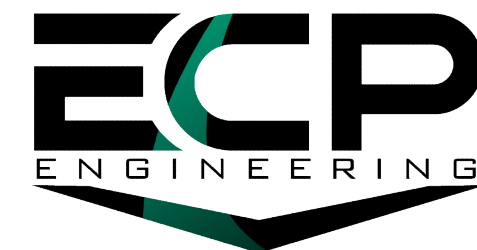

SIZE B 15612 S KEELER TERRACE OLATHE, KS 66062 (913) 393-0007 | www.GETECP.com

REV 0

CONFIDENTIAL. THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF EARTH CONTACT PRODUCTS, LLC. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF ECP. ALL RIGHTS RESERVED UNDER COPYRIGHT LAW.

SHEET 1 OF 1